

Automatic Door Opening



SPECIFICATIONS


| Item | Type | MS-750 | |
|-------------------------|---------------------------------|------------------|--|
| Door Panel weight | 150X1 (single) | 100kgX2 (double) | |
| Door width | 700mm-2000mm | 700mm-2000mm | |
| Channel length | 2100mm (A) | 4.2M-2.1+2.1(AA) | |
| | 2400mm(B) | 4.8M-2.4+2.4(BB) | |
| | 3000mm(C) | 6m-3+(CC) | |
| | 4200mm | 4.2X11 | |
| Opening speed | 20 - 50 cm/sec | 20 - 50 cm/sec | |
| Closing speed | 20 - 40 cm/sec | 20 - 40 cm/sec | |
| Control system | microprocessor | | |
| Motor | 24V DC 35W brushless Motor | | |
| Power supply | AC 110V / 220V 50 / 60Hz±10% | | |
| External power supply | 24V DC / 500mA | | |
| Average consumption | 35W | | |
| Open time | 0.5-15 sec (adjustable) | | |
| Ambient temperature | -20°C--+50°C | | |
| Full/half open function | Available (1/2 or 2/3) | | |
| LED display | 14mmX8mm (4 digital) | | |

BASIC MODULE

- Switched power supply unit
- 24V DC brushless motor driver unit
- Programme control unit
- Microprocessor
- Digital operating cycle control
- Digital scale
- Plain text display

EXPANSION MODULE

- Partial opening, freely
- selectable opening width,
- 1/2 or 2/3 opening
- Mains-free closing or opening via
- battery pack (optional)
- Locking device (optional)

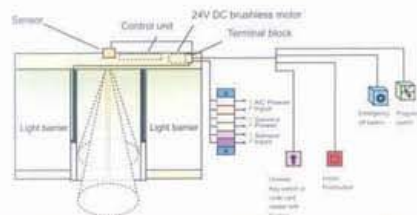

(An ISO 9001 Certified Company)
General Automation Pvt. Ltd.

Vyapara Bhavan, Puthencruz (Via), Choondy
Ernakulam Dist., Pin: 682 308, Kerala State, India
Ph: 91-484-2760212, 2762796 Fax: 91-484-2761490
E-mail : genauto@satyam.net.in
Web: www.generalautomation.in

